

Vertical Machining Center

VP Series



Tongtai Tongtai Machine & Tool Co., Ltd.

Headquarters

No.3, Luke 3rd Rd., Luzhu Dist., Kaohsiung City 82151, Taiwan

TEL : 886-7-9761588 FAX : 886-7-9761589

www.tongtai.com.tw

Taoyuan Branch	TEL : 886-3-4551399	FAX : 886-3-4559730
Taichung Branch	TEL : 886-4-23589600	FAX : 886-4-23589993
Japan Branch	TEL : 81-4-71438355	FAX : 81-4-71438360
Europe Branch	TEL : 31-161-454639	FAX : 31-161-454768
Romania Branch	TEL : 40-264-415273	FAX : 40-264-403983
Malaysia Branch	TEL : 603-78597113	FAX : 603-78597115
Vietnam Branch	TEL : 84-4-62766090	
Thailand Branch	TEL : 66-2-7443440	FAX : 66-2-3986518
Indonesia Office	TEL : 62-21-45850875	FAX : 62-21-45850876

China Operation Center

Shuzhou Tong-yu Machine & Tool Co., Ltd.

No.555 Huahong Rd., Economic Development Zone of Wujiang, Suzhou City, Jiangsu Province, China

TEL : 86-512-63430168

FAX : 86-512-63431622

E-mail : sales@tong-yu.com.cn

Wuhan Branch	TEL : 86-27-84586587	FAX : 86-27-84853595
Chongqing Branch	TEL : 86-23-67865925	FAX : 86-23-67867717
Guandong Branch	TEL : 86-769-81158198	FAX : 86-769-81158108
Tianjin Branch	TEL : 86-22-24417640	FAX : 86-22-24416738
Shanghai Office	TEL : 86-21-24208138	FAX : 86-21-34073262
Shenyang Office	TEL : 86-24-24142968	FAX : 86-24-24115782

Affiliates

Honor Seiki Co., Ltd.	Asia Pacific Elite Corp.	Quick-Tech Machinery Co., Ltd	PCI-SCEMM	ANGER Machining GmbH
TEL : 886-7-9759888	TEL : 886-4-23589313	TEL : 886-6-3841155	TEL : 33-4-77426161	TEL : 43-7229-71041-0
FAX : 886-7-9759999	FAX : 886-4-23588913	FAX : 886-6-3841177	FAX : 33-4-77426023	FAX : 43-7229-71041-199
www.honorseiki.com.tw	www.apecnc.com	www.quicktech.com.tw	www.pci.fr	www.anger-machining.com



VP Series



- Direct-drive spindle with dual-contact system provides excellent machining quality and efficiency.
- High quality spindle and high rigidity structure design subject to high standards of machine accuracy to achieve good cutting performance.
- By Tongtai production system, we check every detail process from design, manufacturing, assembly and QC.
- The new generation exterior design is elegant and easier than ever to operate.



CONTENTS

- 03 Main structure
- 07 Operator convenience
 - Machining capacity
- 08 Spindle output and torque chart
- 09 Standard/Optional accessories
 - Machine dimension
- 10 Specifications

Main specifications


	VP-6	VP-8	VP-10
Spindle	12,000 rpm	10,000/15,000 rpm	
Rapid traverse	48/48/48 m/min	48/48/36 m/min	36/36/36 m/min
Travel	610/410/510 mm	820/510/535 mm	1020/510/600 mm

Main structure


X/Y/Z axis specification

	VP-6	VP-8	VP-10
Spindle	12,000 rpm	10,000/15,000 rpm	
Rapid traverse	48/48/48 m/min	48/48/36 m/min	36/36/36 m/min
Travel	610/410/510 mm	820/510/535 mm	1020/510/600 mm

- Excellent performance/price ratio
- Stable machining precision
- Smarter and reliable standard functions
- Reliable quality
- High production efficiency and stability

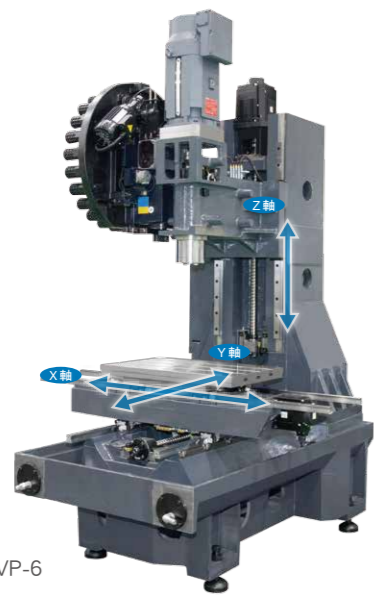

VP-6

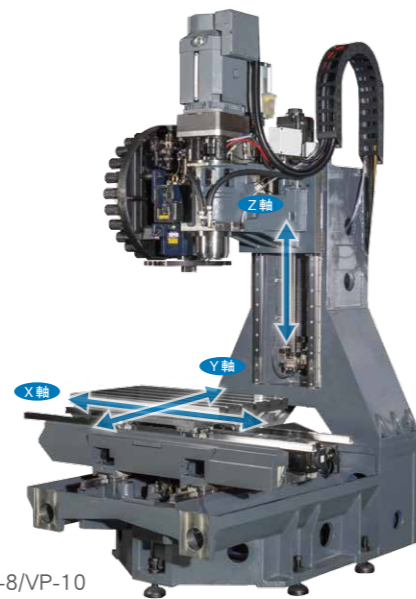


VP-8/VP-10

Working area

	A	B	C	D
VP-6	610	410	510	100
VP-8	820	510	535	100
VP-10	1,020	510	600	100


Unit : mm

	E	F
VP-6	635 mm	350 kg
VP-8	900 mm	500 kg
VP-10	980 mm	500 kg

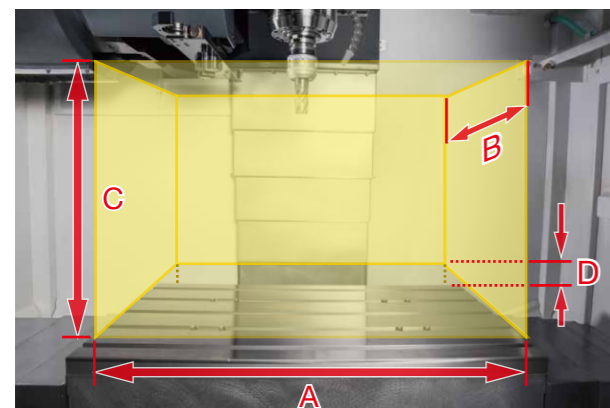


High-rigidity frame structure design

Our base and column castings feature vibration-absorbing ribs that transfer vibration away from the cutting area.

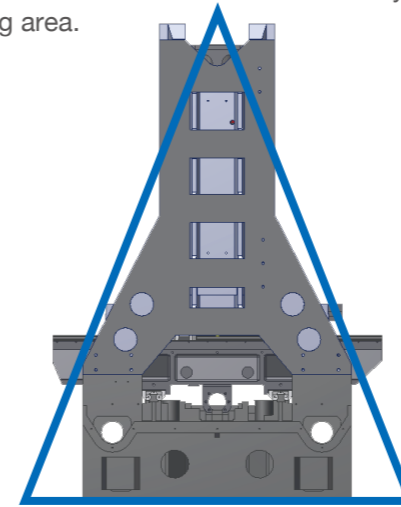

Finite Element Analysis (FEA)

Advanced FEA is used to simulate various cutting loads. The ribs distribution is optimized and alleviates weight on the machine.

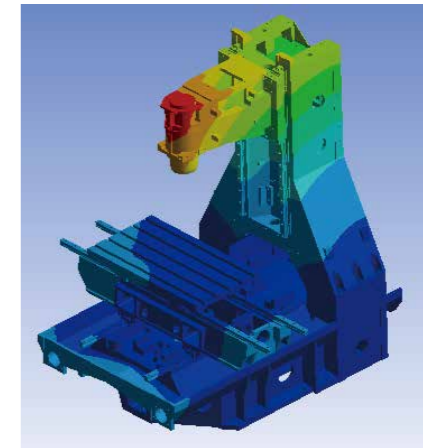

Linear guideways

VP Series use linear guideways for each axis. Linear guideways are preloaded to provide zero clearance between the moving surfaces. They have a very low coefficient of friction, which allows faster movements without sacrificing repeatability or positioning accuracy.




Direct-coupled servo motors

Servo motors are coupled directly to the ballscrews with non-backlash steel couplings. This greatly improves positioning accuracy, and provides more accurate threading and contouring. And they don't wear out or lose accuracy over time.



High quality spindle

- Clamping position sensors send the signals to the machine controller based on the position. (Tool Unclamping / Tool Clamping / Without Tool) (VP-8/VP-10)
- By employing winding switching, a wider rate output range require for the spindle driving motor of a machine tool is achieved.

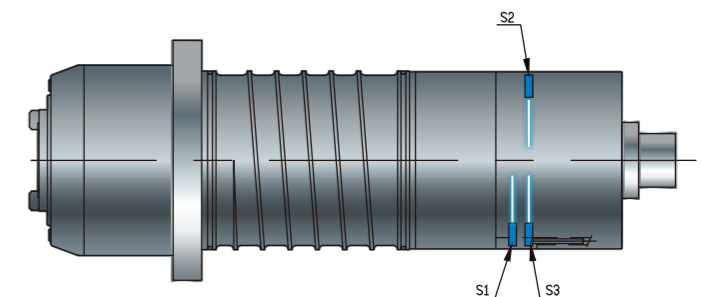

Main structure


Ballscrew

The ballscrews are center mounted and supported on both ends by high precision angular contact thrust bearings. This single pre-tension design provides outstanding positioning repeatability with minimized thermal growth.



Stability

A gap design between column and electrical cabinet to avoid heat transfer.

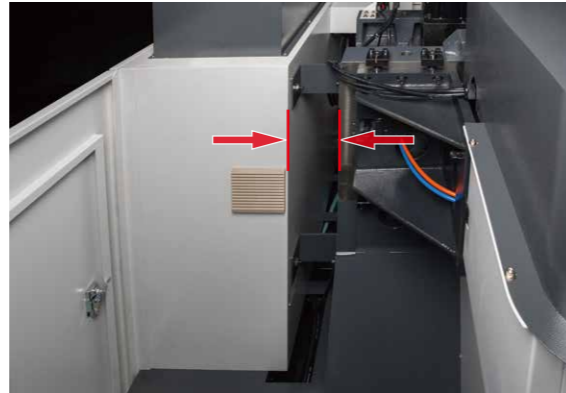

Safety

Safety glass window, which has passed EN12417 standards and certificated by CE, is adopted for providing excellent protection to the operator. The impact strength is 200 times that of tempered glass. Furthermore, the front door uses the multiple safety window (tempered glass mixes with PC), and is able to extend the usage life.



Tool management

Standard equipped with stable and rapid tool magazine. The time of T to T is 2.0 sec. and C to C is 3.6 sec. ATC is controlled by inverter, durability and less maintenance are superior than the traditional braking system. (ISO 10791-9)



Thanks to absolute encoder, cam box signal transfer faster and stable. With Tongtai PLC logic setting, ATC will re-try which reduces the possibilities of machine stop when errors happened during tool changing.



Direct-drive spindle

Direct-drive spindle that is coupled directly to the motor provides high accuracy, high acceleration ability, low vibration, long usage life, and easy to maintain. Flexible coupling prevent the spindle from abnormal heat increment and thermal deformation. Moreover, the customer is able to adopt dual-contact tool holders for getting higher precise machining performances (also available for BT-40).



		Max. Speed	BBT-40	CTS
VP-6	Std.	12,000 rpm	●	X
	Opt.	12,000 rpm	●	●
VP-8/VP-10	Std.	10,000 rpm	●	X
	Opt.	10,000 rpm	●	●
	Opt.	15,000 rpm	●	X
	Opt.	15,000 rpm	●	●

Dual-contact (BIG-PLUS)


Spindle cooling system (Opt.)

To reduce the thermal displacement, spindle chiller is available as optional equipment, which could automatically adjusted spindle temperature according to machine temperature.



Coolant tank

The large-capacity tray and high-mesh filter prevent chips from entering the coolant tank, and easy to maintain. Chip conveyor is also available as optional equipment.

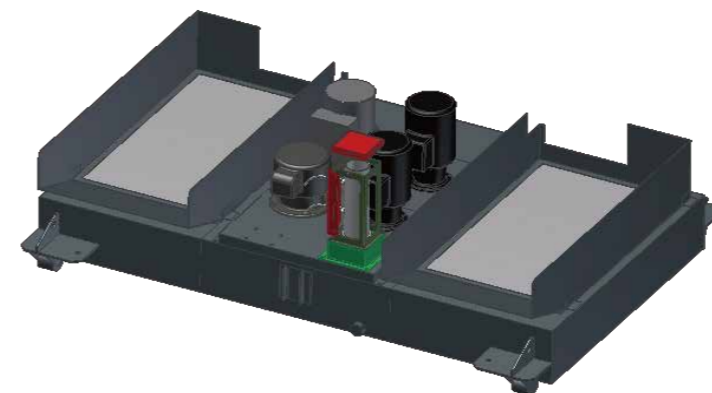

Coolant through spindle(CTS) (Opt.)

This feature improves the machining process more effectively especially with deep hole drilling operations and at the same time, increasing the tool life.

Coolant through spindle	
Optional	20 bar
	50 bar



Filter type coolant tank	
Standard	40-mesh filter
	220 L (VP-6)
	280 L (VP-8/VP-10)

Conveyor type coolant tank	
Optional	40-mesh filter
	Chain type chip conveyor
	320 L

Accessories	
Optional	Coolant level detection
	Disc type oil skimmer

Operator convenience·Machining capacity

Ergonomic design

An easy-to-use operation panel which can swivel from 0-90°.




Easy to maintain

Controls are on the side panel to facilitate maintenance.



Machining capacity


Benchmark:
Mitsubishi SJ-D7.5-120-01 5.5/7.5 kW
Please notice the cutting data is just for reference. Different tools and spindle motors will influence the realistic performance results.

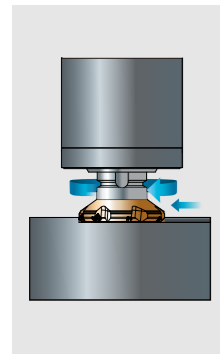

VP-6

Face mill	S45C	Face mill	ADC12	Drill	S45C	Tap	S45C
Tool	Ø80x6T	Tool	Ø80x6T	Tool	Ø30	Tool	M20x2.5P
Spindle speed	1,150 rpm	Spindle speed	5,250 rpm	Spindle speed	371 rpm	Spindle speed	100 rpm
Feedrate	377 mm/min	Feedrate	1,320 mm/min	Feedrate	0.15 mm/rev	Thread depth	40 mm
Cutting width	65 mm	Cutting width	65 mm	Hole depth	50 mm		
Cutting depth	1.5 mm	Cutting depth	2.6 mm				
Chip quantity	263 cc/min	Chip quantity	887 cc/min				

Benchmark:
Mitsubishi: SJ-VK15-28FZT(F) 11/15 kW
FANUC: ail12/10000 11/15 kW




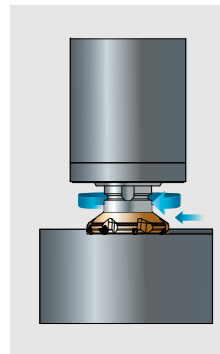


VP-8/VP-10



Face mill	S45C	Face mill	ADC12	Drill	S45C	Tap	S45C
Tool	Ø80x6T	Tool	Ø80x6T	Tool	Ø32	Tool	M24x3P
Spindle speed	1,493 rpm	Spindle speed	4,478 rpm	Spindle speed	248 rpm	Spindle speed	133 rpm
Feedrate	2,240 mm/min	Feedrate	6,178 mm/min	Feedrate	0.3 mm/rev	Thread depth	45 mm
Cutting width	65 mm	Cutting width	65 mm	Hole depth	50 mm		
Cutting depth	3.2 mm	Cutting depth	3.8 mm				
Chip quantity	465 cc/min	Chip quantity	1,659 cc/min				

Spindle output and torque chart

VP-6 ■ Std. ▲ Opt.

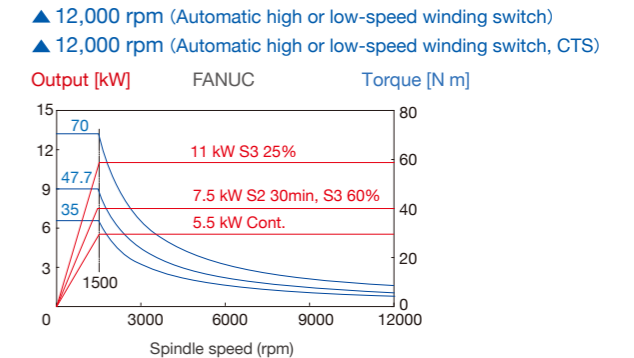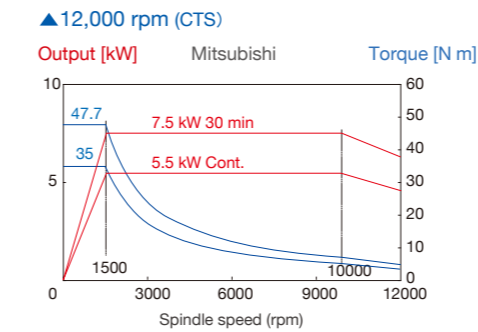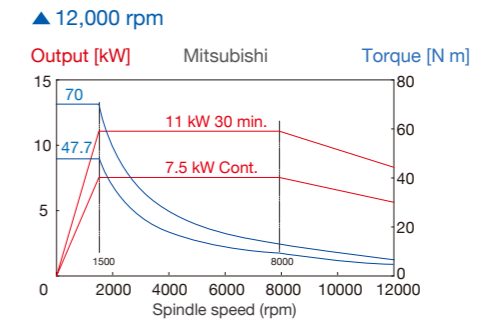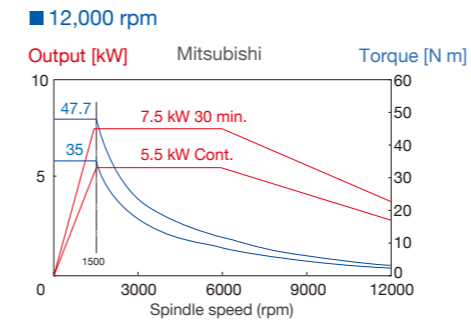


VP-8/VP-10 ■ Std. ▲ Opt.

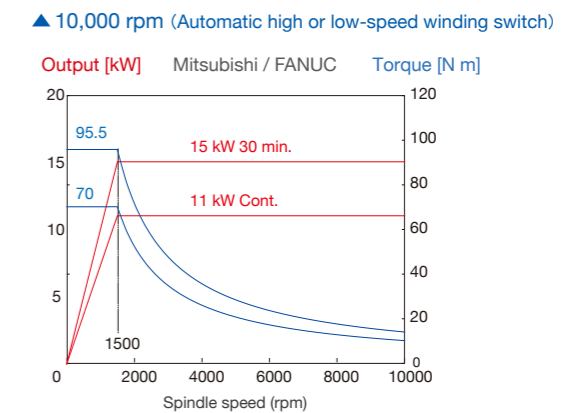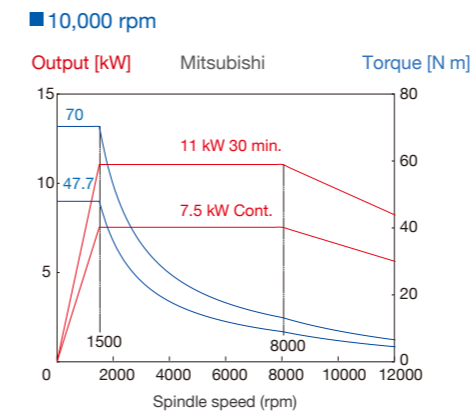


▲ 15,000 rpm (Automatic high or low-speed winding switch)

▲ 15,000 rpm (Automatic high or low-speed winding switch, CTS)

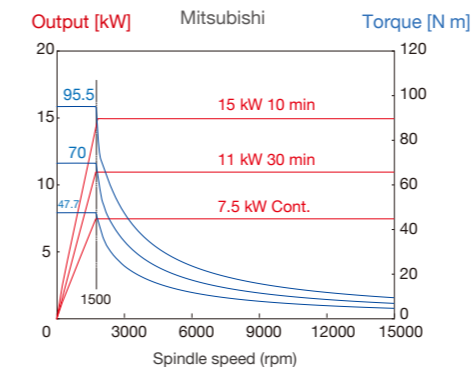

▲ 15,000 rpm (Automatic high or low-speed winding switch)

▲ 15,000 rpm (Automatic high or low-speed winding switch, CTS)

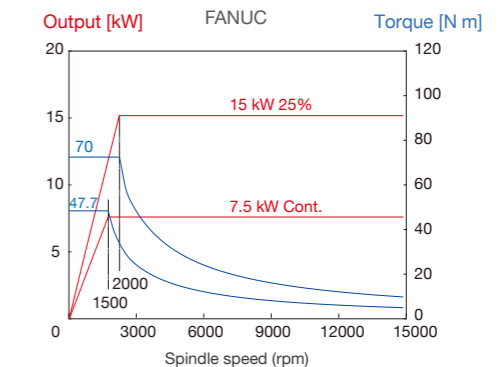

Std. / Opt. accessories·Machine dimension


Specification

Item	Standard ● Optional ○		Item	Standard ● Optional ○	
	Std.	Opt.		Std.	Opt.
LED lighting	●		Disc type oil skimmer		○
Manual pulse generator	●		Chip shower		○
Workpiece counter (CNC)	●		Auger-style chip conveyor		○
Tool magazine cover	●		Automatic door		○
Tri-color warning light (LED)	●		Mist collector		○
Tool magazine (24 tools)	●		Spindle oil cooler		○
Bed flushing system	●		Transformer/ Stabilizer		○
Air blow system	●		Tool length/breakage measurement system		○
Interlock	●		NC rotary table		○
High speed and high precision control mode II (Mitsubishi M70VA)	●		Hydraulic units and interface		○
Blocks in pre-read buffer (Mitsubishi M70VA)	●		FANUC fine mold machining package (AI contour control II · blocks in pre-read buffer...)		○
Automatic low- or high-speed winding switch(※)	●		Linear scale		○
Nozzle coolant	●		Automatic power off system		○
Air gun set	●		Tool magazine (30 tools) (VP-8/VP-10)		○
220L coolant tank (VP-6)	●		Electrical cabinet cooler		○
280L coolant tank (VP-8/VP-10)	●		CE standards		○
320L coolant tank with chip conveyor		○			
Coolant gun set		○			


(※ For the specification of spindle motor, please refer to the information in Page 8)

Item	Specification	Unit	VP-6	VP-8	VP-10
Table	Table size (L×W)	mm	700×410	900×510	1,070×510
	Max. loading capacity	kg	350	500	
	Table height from floor	mm	850	900	
	T-slot (size×No.)	mm	18×3	18×5	
Spindle	Spindle taper		7/24 Taper No. 40	7/24 Taper No. 40	
	Spindle speed	rpm	12,000	10,000 (Opt. 15,000)	
Travel	X/Y/Z axis travel	mm	610/410/510	820/510/535	1,020/510/600
	Spindle nose to table	mm	100-610	100-635	100-700
Feed	X/Y/Z axis rapid traverse	m/min	48/48/48	48/48/36	36/36/36
	Cutting feedrate	mm/min	1-10,000	1-10,000	
ATC	Tool shank		BBT-40	BBT-40	
	Tool capacity	pc	24	24 (Opt. 30)	
	Max. tool diameter	mm	Ø75	Ø75	
	Max. tool diameter (w/o adjacent tool)	mm	Ø150	Ø150	
	Max. tool length	mm	250	300	
	Max. tool weight	kg	7	7	
Motor	Spindle motor	kW	5.5/7.5/11	7.5/11 (Opt. 7.5/11/15)	
	X/Y/Z axis servo motor	kW	1.5/2.2/3 (Opt. 1.8/1.8/3)	1.5/2.2/3 (Opt. 1.8/1.8/3)	2.2/2.2/3 (Opt. 1.8/1.8/3)
	Coolant motor	kW	0.82	0.82	
Machine size	Width×depth×height	mm	1,900×2,414×2,752	2,200×2,642×2,945	2,280×2,642×3,010
	Weight	kg	3,700	5,000	5,200

VP-6 Machine dimension

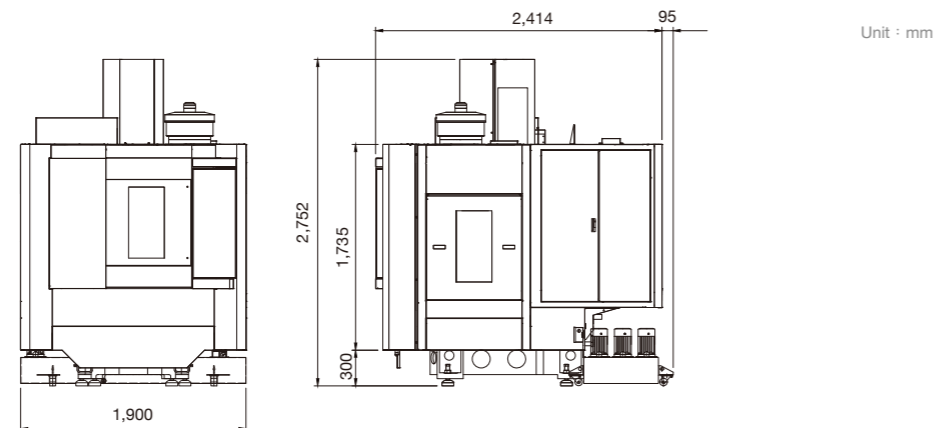

VP-8/VP-10 Machine dimension

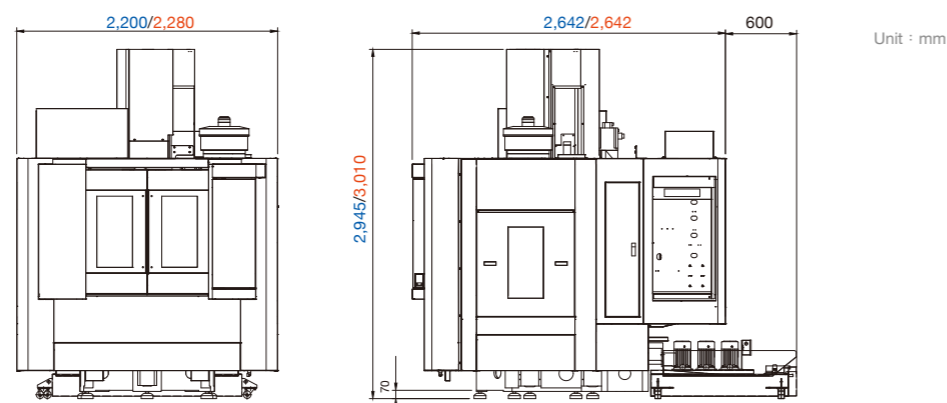

©Specifications may be changed without prior notice.